

VARIMETER Asymmetry Relay BA 9040

Translation
of the original instructions



Your Advantages

- Correct direction of rotation of drives
- Simple wiring

Features

- According to IEC/EN 60255-1
- Recognition of
 - Voltage asymmetry
 - Phase failure
 - Voltage feedback
 - Optionally with phase sequence recognition
- 2 LED displays for power supply and state of contact
- Optionally with adjustable response delay
- Wire connection: Also 2 x 1.5 mm² stranded ferruled, or 2 x 2.5 mm² solid DIN 46228-1/-2/-3/-4
- Width: 45 mm

Product Description


The asymmetry relay BA 9040 of the VARIMETER series monitors asymmetry, reverse voltages, phase failure and incorrect phase sequence in three-phase networks. The early detection of impending failures and preventive maintenance prevent costly damage and as a user you benefit from the operational reliability and high availability of your system.

Approvals and Markings



* see variants

Function Diagram

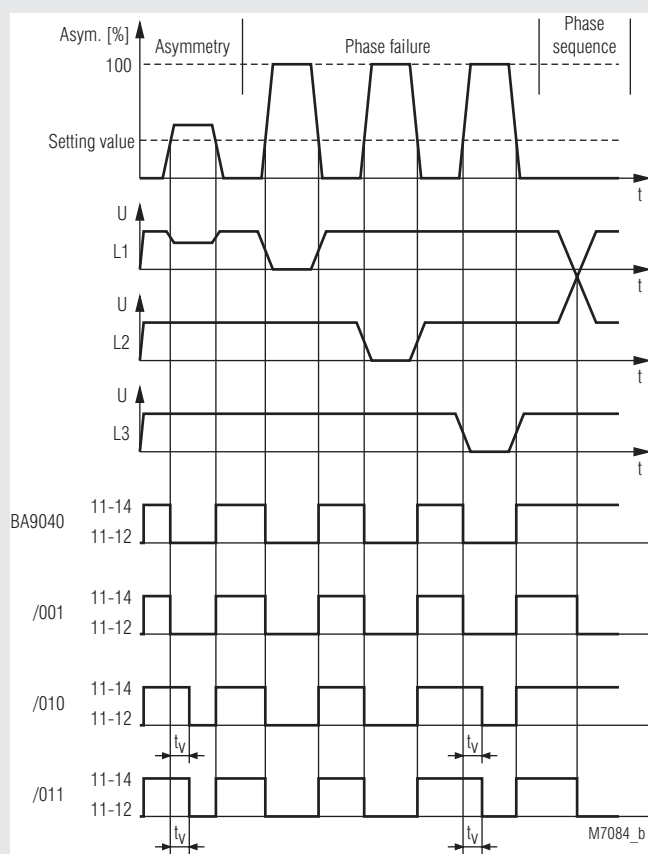

Applications

Monitoring three-phase mains for voltage asymmetry, phase failure or incorrect phase sequence, e.g. in elevators, escalators, crane systems etc.


Indicators

Red LED: On, when supply voltage connected
Green LED: On, when output relay energized

Connection Terminals

Terminal designation	Signal description
L1, L2, L3	Connection of the monitoring 3-phase system
11, 12, 14	1. changeover contact
21, 22, 24	2. changeover contact
X1, X2 (only for /301, /302)	Nominal voltage X1/X2 bridged: U_N X1/X2 not bridged: $U_N \cdot 1.15$ (/301) $U_N \cdot 1.10$ (/302)

Circuit Diagrams

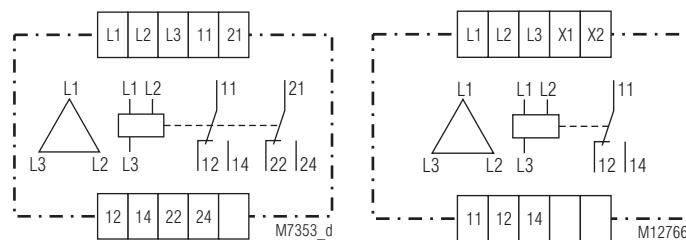


BA 9040.12

BA 9040.11/301
BA 9040.11/302

Technical Data	
Input	
Nominal voltage U_N:	100, 110, 120, 208, 220, 230, 240, 380, 400, 415, 440, 460, 500, 550, 600, 660, 690 V
Voltage range:	0.8 ... 1.1 U_N
Nominal consumption:	Approx. 4.8 VA
Nominal frequency:	50 / 60 Hz
Frequency range:	45 ... 65 Hz
Temperature influence:	< 0.05 % / K
Frequency influence:	< 0.02 % / Hz
Setting Ranges	
Setting range:	5 ... 15 % voltage asymmetry
Repeat accuracy (constant parameters):	≤ 0.5 %
Release ratio:	< 4 % U_N
Voltage feedback recognition:	Up to 100 % - setting value, e.g. when setting value = 5 % asymmetry, 100 % - 5 % = 95 % Recognition of voltage feedback up to 95 %
Time delay t_v:	0.5 ... 5 s
Output	
Contacts	.11: 1 changeover contact (/301, /302) .12: 2 changeover contacts
Response/release time:	≤ 1 s / ≤ 250 ms
Thermal current I_{th}:	6 A (see continuous current limit curve)
Switching capacity to AC 15:	2 A / AC 230 V IEC/EN 60947-5-1
NO contact:	1 A / AC 230 V IEC/EN 60947-5-1
NC contact:	1 A / DC 24 V IEC/EN 60947-5-1
To DC 13:	1 A / DC 24 V IEC/EN 60947-5-1
NO contact:	1 A / DC 24 V IEC/EN 60947-5-1
NC contact:	1 A / DC 24 V IEC/EN 60947-5-1
Electrical life at 3 A, AC 230 V $\cos \varphi = 1$:	10 ⁵ switching cycles IEC/EN 60947-5-1
Permissible switching frequency:	6000 switching cycles / h
Short circuit strength max. fuse rating:	4 A gG / gL IEC/EN 60947-5-1
Mechanical life:	10 x 10 ⁶ switching cycles
General Data	
Operating mode:	Continuous operation
Temperature range	
Operation:	- 20 ... + 60 °C
Storage:	- 20 ... + 60 °C
Altitude:	≤ 2000 m
Clearance and creepage distances	
Rated impulse voltage / pollution degree:	4 kV / 2 IEC 60664-1
Terminals X1 / X2:	No galvanic separation to L1 / L2 / L3
Overvoltage category:	III up to 3 AC 480 V II > 3 AC 480 V
EMC	
Electrostatic discharge:	8 kV (air) IEC/EN 61000-4-2
HF irradiation	
80 MHz ... 2.7 GHz:	10 V / m IEC/EN 61000-4-3
Fast transients:	2 kV IEC/EN 61000-4-4
Surge voltages between	
wires for power supply:	2 kV IEC/EN 61000-4-5
Between wire and ground:	4 kV IEC/EN 61000-4-5
HF wire guided:	10 V IEC/EN 61000-4-6
Interference suppression:	Limit value class B EN 55011
Degree of protection	
Housing:	IP 40 IEC/EN 60529
Terminals:	IP 20 IEC/EN 60529
Housing:	Thermoplast with V0 behaviour according to UL subject 94
Vibration resistance:	Frequency 10 ... 55 Hz, Amplitude 0.35 mm IEC/EN 60068-2-6
Climate resistance:	20 / 060 / 04 IEC/EN 60068-1

Technical Data	
Wire connection:	2 x 2.5 mm ² solid or 2 x 1.5 mm ² stranded wire with sleeve DIN 46228-1/-2/-3/-4
Stripping length:	10 mm
Wire fixing:	Flat terminals with self-lifting clamping piece IEC/EN 60999-1
Fixing torque:	0.8 Nm
Mounting:	DIN rail IEC/EN 60715
Weight:	325 g
Dimensions	
Width x height x depth:	45 x 74 x 133 mm
CSA-Data	
Switching capacity:	3A 230Vac
Wire connection:	60°C / 75°C copper conductors only AWG 20 - 14 Sol Torque 0.8 Nm AWG 20 - 16 Str Torque 0.8 Nm
 Technical data that is not stated in the CSA-Data, can be found in the technical data section.	
CCC-Data	
Thermal current I_{th}:	5 A
Switching capacity to AC 15:	2 A / AC 230 V IEC/EN 60947-5-1
To DC 13:	1 A / DC 24 V IEC/EN 60947-5-1
 Technical data that is not stated in the CCC-Data, can be found in the technical data section.	
Standard Types	
BA 9040.12/001	3 AC 400 V 50/60 Hz
Article number:	0043764
• With phase sequence detection	
• Without operate delay	
• Output:	2 changeover contacts
• Nominal voltage U_N :	3 AC 400 V
• Width:	45 mm
Variants	
BA 9040.12/60:	With CSA approval on request
BA 9040:	With CCC approval on request
BA 9040.11/301:	Like BA 9040/001, with bridge X1/X2: U_N without bridge X1/X2: $U_N^* 1.15$ Both LEDs green, 1 changeover contact
BA 9040.11/302:	Like BA 9040, with bridge X1/X2: U_N without bridge X1/X2: $U_N^* 1.1$ 1 changeover contact
Ordering example for variants	
BA 9040N .12 /0 3 AC 400 V 50 / 60 Hz	
	Nominal frequency
	Nominal voltage
	0: Without phase sequence recognition
	1: With phase sequence recognition
	0: Without t_v
	1: With t_v
	Contacts
	Type

Characteristic

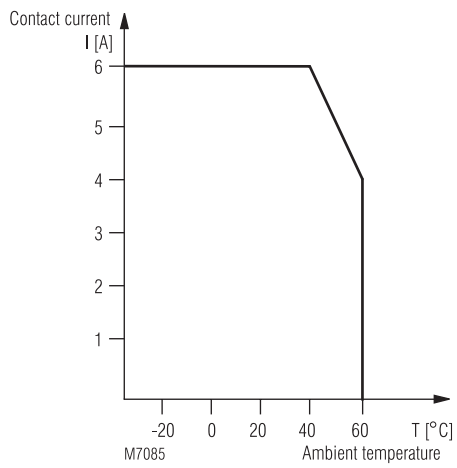

Continuous current limit curve

Safety Remark



Danger due to electric shock!
Danger to life or serious injury.

The terminals X1 - X2 have no galvanic isolation from the measuring circuit L1 - L2 - L3. They must therefore be controlled with potential-free contacts.

