

Datasheet

→ SSSA15OI_C008

03/11/2026



Technical data

Latching key switch with M12 connection, 4-pin

Type	SSSA15OI_C008
Series	SHORTRON® connect
Rubric	Key-operated switch
Approvals	CE, cURus, ENEC10, VDE, UKCA



→ General data

Design	Round
Operating temperature	-25 °C ... 70 °C
Panel cut-out	Ø 22.3 mm
Mounting depth	34 mm
Front bezel colour	Silver-coloured
Contact material	AgNi
Storage temperature	-40 °C ... 80 °C
Standards	EN 60947-5-1 EN 61058-1
Degree of protection front	IP65
Degree of protection rear	IP65 with connected M12 IP67 with connected M12
Material group	I

→ Electrical data

<i>Rated operating voltage</i> IEC/EN 60947-5-1	35 V AC 35 V DC
<i>Rated operating current</i> IEC/EN 60947-5-1	1 A AC 1 A DC
<i>Rated insulation voltage</i> IEC/EN 60947-5-1	50 V AC 50 V DC
<i>Contact resistance</i>	< 50 mΩ NO new state < 50 mΩ NC new state
<i>Electrical lifetime</i>	30,000 switching cycles at rated voltage
<i>Utilisation category</i> IEC/EN 60947-5-1	AC-15 DC-13
<i>Contact type</i>	1NC 1NO
<i>Bouncing time</i>	< 10 ms NO < 10 ms NC
<i>Rating</i>	General Purpose 24 V DC General Purpose 1 A
<i>Switching capacity</i>	35 V AC/DC 1 A 35 V DC 1 A
<i>Thermal continuous current</i> IEC/EN 60947-5-1	1 A AC
<i>Overvoltage category</i>	II
<i>Pollution degree</i>	2

Safety instructions / installation instructions

- The plug connector must not be connected or disconnected under load

Pin assignment

Pin1	COM
Pin2	NC
Pin3	n.c.
Pin4	NO

→ Mechanical data

<i>Connection</i>	M12 connector 4-polig A coded
<i>Tightening torque connection</i>	max. 0.4 Nm
<i>Tightening torque fixing nut</i>	1.5 Nm ... 1.9 Nm
<i>Mounting position</i>	Any
<i>Mechanical lifetime</i>	30,000 switching cycles
<i>Switching function</i>	Latching function
<i>Switching position</i>	0° key removable 90° maintained, key removable
<i>Positive opening</i>	Acc. to EN60947-5-1, appendix K

Safety instructions / installation instructions


- The M12 connection must not be subjected to mechanical stress, ensure sufficient strain relief!

Note


- Includes 2 keys
- Different locking options available on request

Technical drawings


→ Dimensional drawing

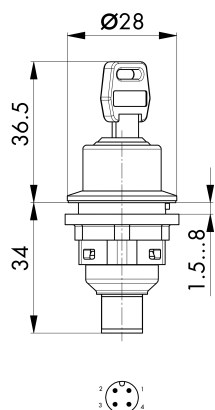


→ Position indicator



→ Cutout dimensions

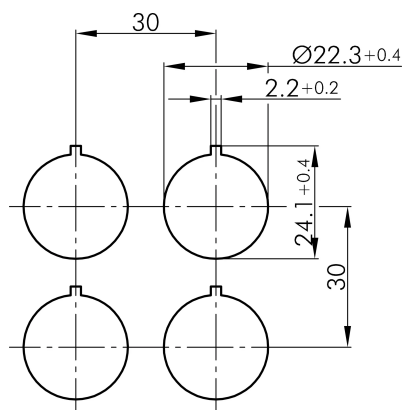

→ Switching path diagram

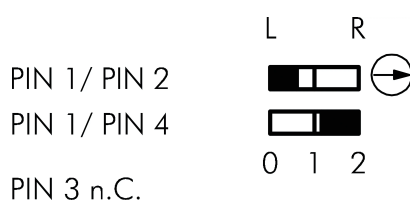

→ Circuit diagram

