


VARIMETER

Undervoltage Relay, 3-phase


IK 9171, IL 9171, SK 9171, SL 9171

Translation
of the original instructions

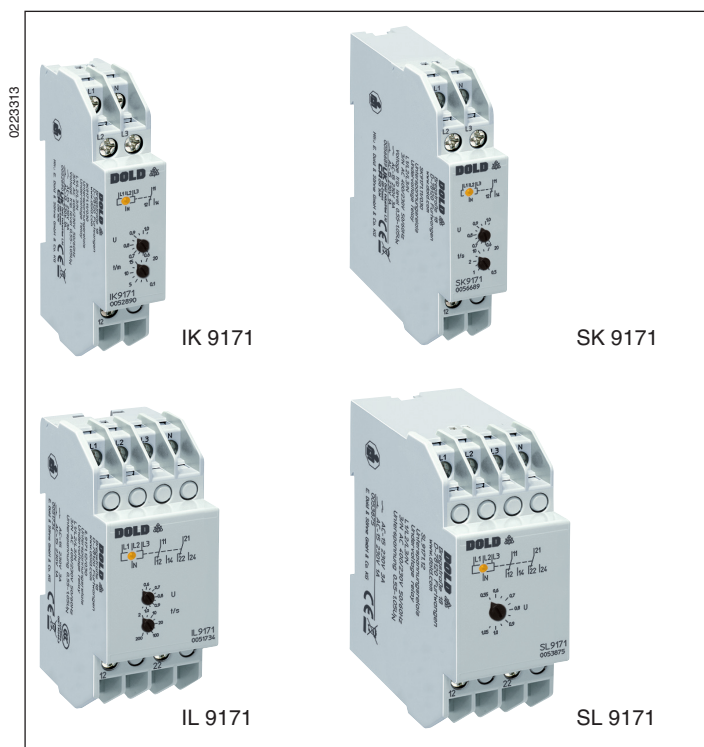


- According to IEC/EN 60255-1
- Monitoring of undervoltage in 3-phase system
- Also for single phase
- Without auxiliary supply
- De-energized on trip
- LED indicator for state of output relay
- Independent of phase sequence
- 1 or 2 changeover contacts
- Optionally fixed or settable response value
- As option with phase sequence detection
- Optionally with or without N
- Optionally with off-delay t_1
- Optionally with on delay t_2
- Devices available in 2 enclosure versions:
 - I-model: Depth 59 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43880
 - S-model: Depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct
- Width:
 - IK 9171, SK 9171: 17.5 mm
 - IL 9171, SL 9171: 35 mm

Approvals and Markings



¹⁾ Only IL 9171; ²⁾ Only IK/SK 9171

Function Diagram

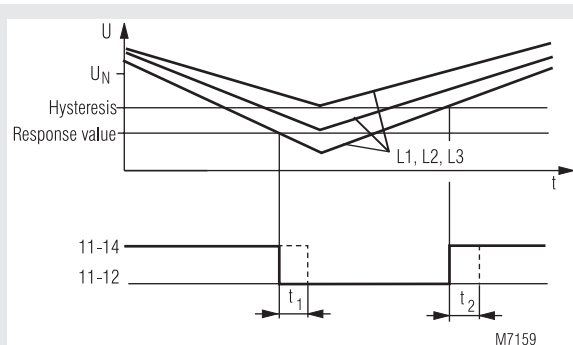

Application

Monitoring of voltage systems on undervoltage. Automatic switching to emergency supply or of emergency light in the case of phase loss according to DIN VDE 0100-710 or DIN VDE 0108.

Variant with t_2 is used in unstable voltage systems, where after phase failure detection the consumers should be energized one after the other. This is done by setting the operate delay e.g. 0.1 ... 20 s of the different relays to different values.

This variant is also used where a consumer after only short phase failure should not be started immediately (e.g. compressors).

Function

The arithmetic mean value of each phase is measured against N. The variants without N measure L1 and L3 against L2 (IK/SK 9171) and L1 and L2 against L3 (IL/SL 9171).

Indicators


Yellow LED: Output contact active (11-14 closed)

Notes

To measure single-phase voltage terminals L1, L2, L3 have to be linked together. The time delay t_1 is only active if the voltage L1-N (IK/SK 9171) or L3-N (IL/SL 9171) is at least $0.5 U_N$.

Please be aware, that devices of this variant show "good" state after applying power supply even when there is a fault e.g. wrong phase sequence or undervoltage. Only after elapse of the time delay t_1 the unit changes into "failure" state.

Circuit Diagrams

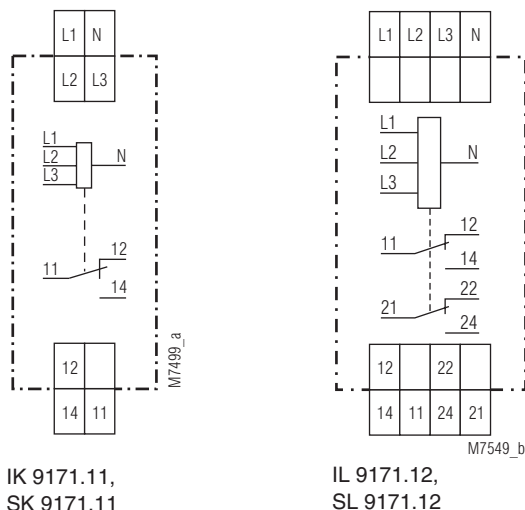

IK 9171.11,
SK 9171.11

IL 9171.12,
SL 9171.12

Technical Data		
Input Circuit		
Nominal voltage U_N		
3-phase without neutral:	3 AC 100 V, 110 V, 127 V, 220 V, 230 V, 3 AC 240 V, 290 V, 400 V, 415 V, 440 V, 3 AC 480 V, 500 V	
3-phase with neutral:	3/N AC 100 V / 58 V; 3/N AC 110 V / 64 V; 3/N AC 220 V / 127 V; 3/N AC 230 V / 133 V; 3/N AC 380 V / 220 V; 3/N AC 400 V / 230 V; 3/N AC 415 V / 240 V; 3/N AC 440 V / 254 V; 3/N AC 480 V / 277 V; 3/N AC 500 V / 290 V 1.15 U_N continuously	
Max overload:		
Nominal consumption		
IK/SK 9171.11:	Approx. 6 VA	
IL/SL 9171.12:	Approx. 8 VA	
Frequency range:	45 ... 65 Hz	
Setting ranges		
Response value:	Fixed: 0.7 or 0.85 U_N Adjustable: 0.55 ... 1.05 U_N Approx. 4 % of setting value	
Hysteresis:		
Time delay t_1 / t_2:	0.5 ... 20 s	
Reaction time:	Approx. 100 ms	
Output		
Contacts		
IK/SK 9171.11:	1 changeover contact	
IL/SL 9171.12:	2 changeover contacts	
Contact material:	AgNi	
Switching voltage:	AC 250 V	
Thermal current I_{th}:	4 A	
Switching capacity to AC 15		
NO contact:	3 A / AC 230 V	IEC/EN 60947-5-1
NC contact:	1 A / AC 230 V	IEC/EN 60947-5-1
Electrical life to AC 15 at 1 A, AC 230 V:	$\geq 3 \times 10^5$ switching cycles	
Short circuit strength max. fuse rating:	4 A gG / gL IEC/EN 60947-5-1	
Mechanical life:	$\geq 30 \times 10^6$ switching cycles	
General Data		
Operating mode: Continuous operation		
Temperature range:		
Operation:	- 20 ... + 60 °C	
Storage:	- 25 ... + 60 °C	
Relative air humidity:	93 % at 40 °C	
Altitude:	≤ 2000 m	
Clearance and creepage distances		
Rated impulse voltage / pollution degree:	4 kV / 2	IEC 60664-1
EMC		
Electrostatic discharge:	8 kV (air)	IEC/EN 61000-4-2
HF irradiation		
80 MHz ... 1 GHz:	20 V / m	IEC/EN 61000-4-3
1 GHz ... 2 GHz:	20 V / m	IEC/EN 61000-4-3
2 GHz ... 2.7 GHz:	1 V / m	IEC/EN 61000-4-3
Fast transients:	2 kV	IEC/EN 61000-4-4
Surge voltages		
Between		
wires for power supply:	2 kV	IEC/EN 61000-4-5
Between wire and ground:	4 kV	IEC/EN 61000-4-5
HF-wire guided:	30 V	IEC/EN 61000-4-6
Interference suppression:	Limit value class B	EN 55011
Degree of protection		
Housing:	IP 40	IEC/EN 60529
Terminals:	IP 20	IEC/EN 60529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94	
Vibration resistance:	Amplitude 0.35 mm, frequency 10 ... 55 Hz, IEC/EN 60068-2-6	
Climate resistance:	20 / 060 / 04 IEC/EN 60068-1	
Terminal designation:	EN 50005	
Wire connection:	2 x 2.5 mm ² solid or 2 x 1.5 mm ² stranded ferruled DIN 46228-1/-2/-3/-4	
Wire fixing:	Flat terminals with self-lifting clamping piece IEC/EN 60999-1	
Fixing torque:	0.8 Nm	

Technical Data		
Mounting:	DIN rail	IEC/EN 60715
Weight		
IK 9171:	65 g	
SK 9171:	83 g	
IL 9171:	110 g	
SL 9171:	137 g	
Dimensions		
Width x height x depth		
IK 9171:	17.5 x 90 x 59 mm	
SK 9171:	17.5 x 90 x 98 mm	
IL 9171:	35 x 90 x 59 mm	
SL 9171:	35 x 90 x 98 mm	
Classification to DIN EN 50155 for IK 9171		
Vibration and shock resistance:	Category 1, Class B	IEC/EN 61373
Protective coating of the PCB:	No	
Standard Type		
IK 9171.11/200 3/N AC 400/230 V 50/60 Hz 0.85 U _N		
Article number:	0049292	
SK 9171.11/200 3/N AC 400/230V 50/60Hz 0.85 U _N		
Article number:	0054744	
• Output:	1 changeover contact	
• Nominal voltage U _N :	3/N AC 400/230 V	
• Detection of undervoltage at	< 0.85 U _N	
• Fixed response value:	0.85 U _N	
• No time delay		
• For 3p3w connection		
• Width:	17.5 mm	
Variants		
I_ 9171/001		
├── 0 NC circuit operation with N		
├── 1 NC circuit operation without N		
├── 0 Without time delay		
├── 3 Settable time delay t ₁		
├── 4 Settable time delay t ₂		
├── 0 Settable response value		
├── 2 Fixed response value		
└── K Width 17.5 mm		
└── L Width 35 mm		
IK 9171.11/034:	- With settable time t ₁ - NC circuit operation without N - Detection of phase sequence	
IL 9171.12/801:	As Standard Type /200 but output relay with goldplated contacts. This module is also suitable for switching small loads. The contacts also permit the maximum switching current (4 A). However, since the gold plating will be burnt off at this current level, the device is no longer suitable for switching small loads after this.	
SK 9171.11/800:	Same as IK 9171.11/201 but with increased transient and climate resistance	
Ordering example for variants		
IK 9171 .11 / _ _ _ 3 AC 400 V 50/60 Hz 0.55 ... 1.05 U _N 0.5 ... 20 s		
└── Time delay t ₂		
└── Response value		
└── Nominal frequency		
└── Nominal voltage		
└── Variant, if required		
└── Contact		
└── Type		